

Bemerkungen/Skizze

Technische Informationen siehe Rückseite.

CAMABOX BX4700

Totalbreite:	max. 700 cm min. 215 cm
Ausfall:	max. 400 cm min. 150 cm
Antrieb:	Motor oder Funk io
Armtyp:	BX-433 250 / 300 / 350 / 400 cm
Fall:	5° bis 35° Wandmontage 5° bis 35° Deckenmontage

BX-433 250 cm		
B = mm	K1 / K2 min. mm	K1 / K2 max. mm
3150	160	160
3200	160	193
3300	160	243
3400	160	293
3500	160	343
3600	160	393
3700	160	443
3800	160	493
3900	160	543
4000	160	593
4100	160	643
4200	160	693
4214-6000	160	700
6001-7000	400	700



BX-433 300 cm		
B = mm	K1 / K2 min. mm	K1 / K2 max. mm
3650	160	160
3700	160	193
3800	160	243
3900	160	293
4000	160	343
4100	160	393
4200	160	443
4300	160	493
4400	160	543
4500	160	593
4600	160	643
4700	160	693
4714-6000	160	700
6001-7000	400	700

BX-433/433-1* 350 cm		
B = mm	K1 / K2 min. mm	K1 / K2 max. mm
4150	160	160
4200	160	193
4300	160	243
4400	160	293
4500	160	343
4600	160	393
4700	160	443
4800	160	493
4900	160	543
5000	160	593
5100	160	643
5200	160	693
5214-6000	160	700
6001-7000	400	700

BX-433-1* 400 cm		
B = mm	K1 / K2 min. mm	K1 / K2 max. mm
4650	160	160
4700	160	193
4800	160	243
4900	160	293
5000	160	343
5100	160	393
5200	160	443
5300	160	493
5400	160	543
5500	160	593
5600	160	643
5700	160	693
5714-6000	160	700
6001-7000	400	700


* BX433-1 = immer bei Ausladung 400 cm / für Volant-Plus

MONTAGEPLAN

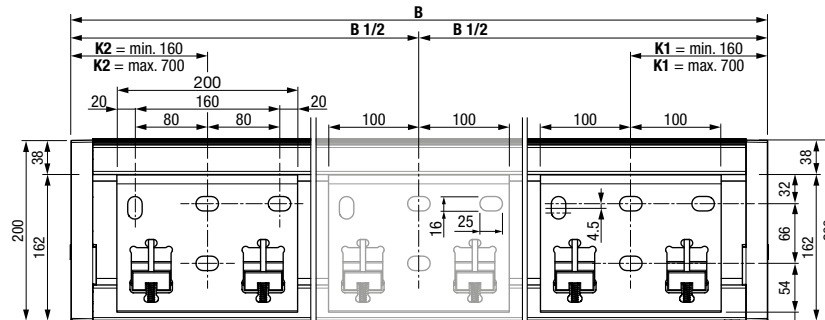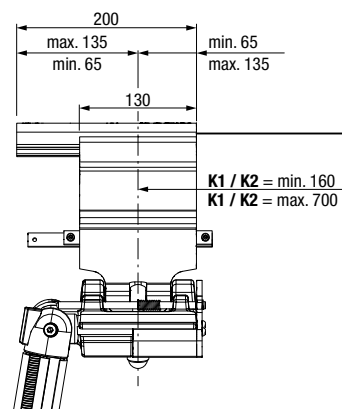
**VARIANTE**

ACHTUNG:
Die Konsolen müssen immer hinter einem Armträger montiert sein.


WANDMONTAGE

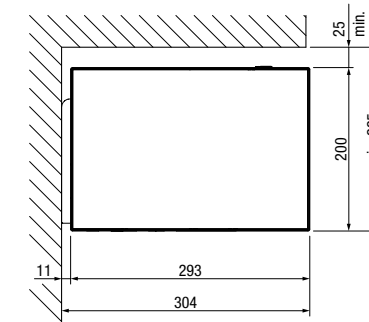


DECKENMONTAGE

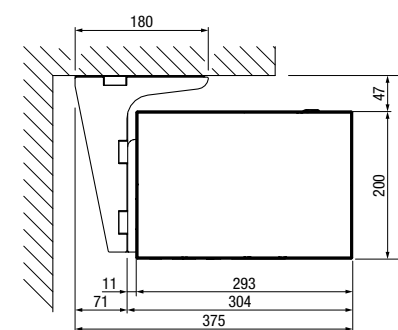

WANDKONSOLE BX-474 (20 cm)

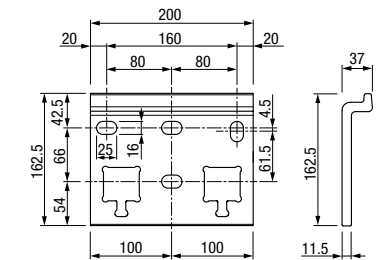

WANDKONSOLE BX-474-1 (30 cm)

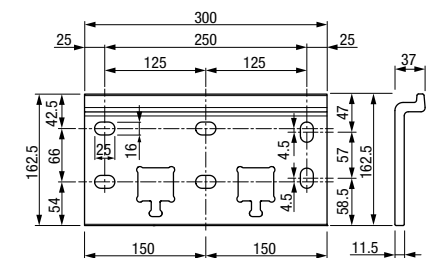

DECKENWINKEL BX-471-1

